

8GGC2

SPECIFICATIONS


Nominal Voltage (V)	6V
Capacity at C/100	198Ah
Weight	68.4 Lbs. (31 kg)
Plate Alloy	Lead Calcium
Posts	Forged terminals & bushings
Container/Cover	Polypropylene
Operating Temperature Range	-76°F (-60°C) – 140°F (60°C)
Charge Voltage @ 68°F (20°C)	
Cycle	2.30 - 2.35 VPC
Float	2.25 - 2.30 VPC
Vent	Self-sealing (2 PSI operation)
Electrolyte	Sulfuric acid thixotropic gel
Resistance	4.0 Milliohms (full charge)
Terminal	T881
Rated non-spillable by ICAO, IATA and DOT Approved by CEC	
Made in the U.S.A by East Penn Manufacturing	
Distributed by:	

Valve-Regulated, Gelled-Electrolyte Battery



DIMENSIONS

Length (mm)	10.25 (260 mm)
Width (mm)	7.13 (181 mm)
Height (mm)	10.88 (276 mm)

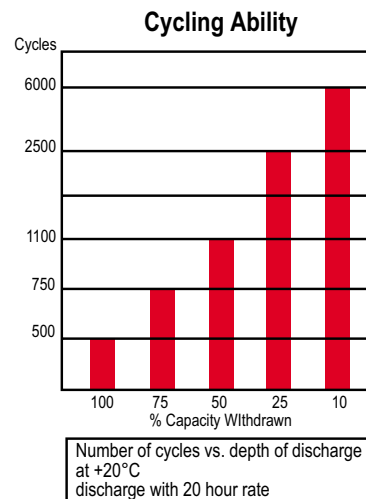

MK Battery

1645 South Sinclair Street • Anaheim, California 92806
Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-Mail: sales@mkbattery.com

